


DRAWING NO.
C750RPJX

REV
B

Customer Drawing

Revision History

REV	DESCRIPTION (ECO)	DATE	APPROVED
A	NEW DRAWING ECN 4591	11/01/10	AK
B	ADD 60 SUFFIX ECN 4811	5/24/11	LF

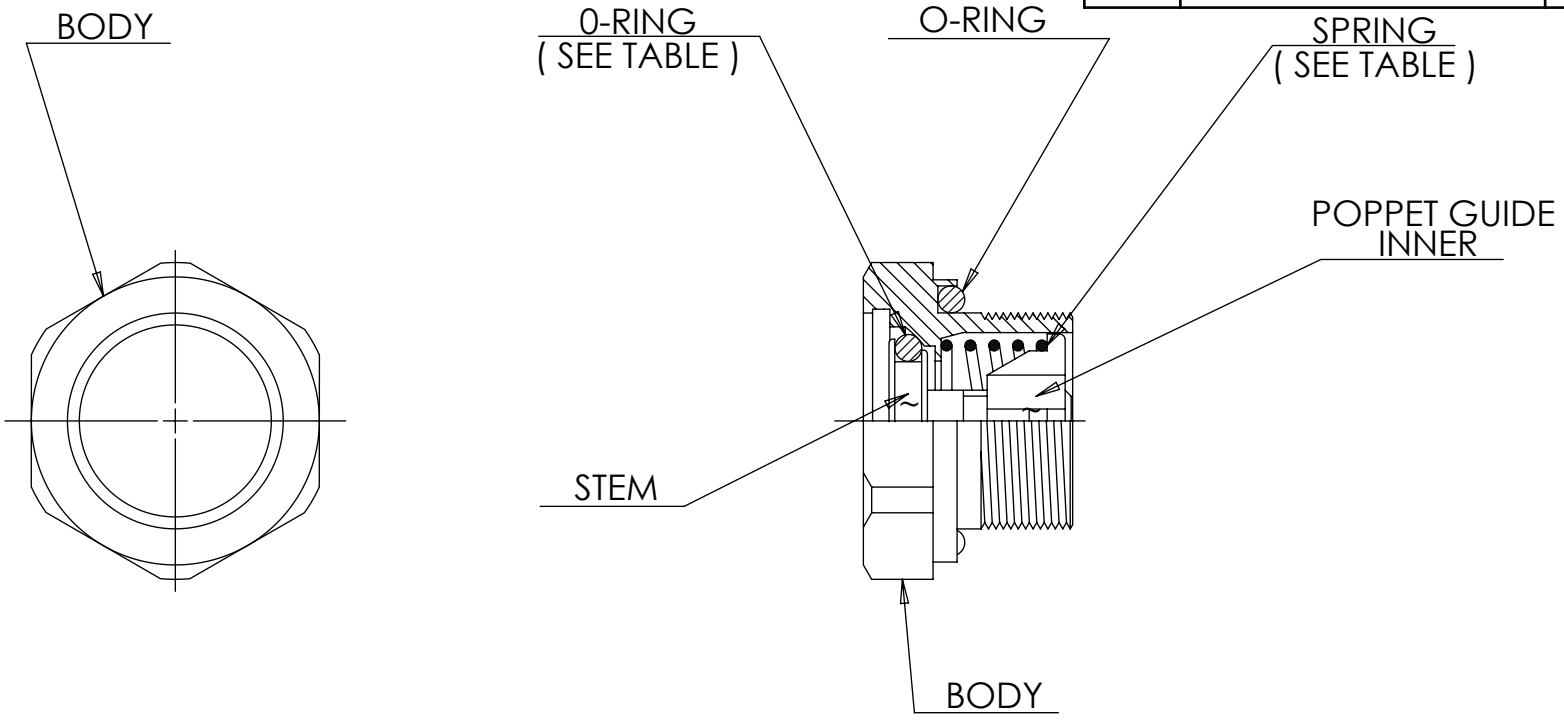

NOTES:

1. AFTER ASSEMBLY, VALVE MUST BE TESTED FOR CRACKING PRESSURE. - CRACKING PRESSURE IS TO BE SET PER CUSTOMER'S REQUIREMENTS.
2. VALVE MUST RE-SEAL AT A PRESSURE NO LESS THAN, 15% BELOW NOMINAL CRACKING PRESSURE.
3. SUFFIX: "X" INDICATES CRACKING PRESSURE.SEE TABLE.

"X" SUFFIX	SPRING PSI	O RING DUROMETER	CRACK PRESSURE
12	1.0	40	1.2 PSI
09	0.85	40	0.9 PSI
60	6.0	70	6.8 PSI
70	6.0	70	7.0 PSI

DRAWN BY	DMC	DATE	11/01/10
APPROVED BY	AK	DATE	
MATERIAL	CLEAR ANODIZE ALUMINUM		
FINISH			
UNLESS OTHERWISE SPECIFIED:	DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 1° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		
THIRD ANGLE PROJECTION			

Halkey-Roberts

TITLE
RELIEF VALVE PRESSURE

SIZE A	DRAWING NO. C750RPJX	REV B
SCALE 2:1	DO NOT SCALE DRAWING	SHEET 1 OF 1

MOLDED PARTS:
GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.